


Orphan Espresso Lido Basic Quick Start Guide

*** Always turn CW to grind! ***

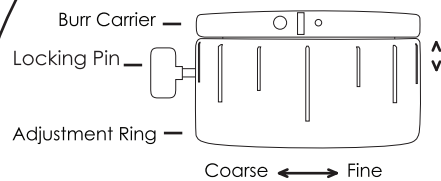

Loosen the Locking Pin.
Turn Adjustment Ring in
the appropriate direction
CCW=Coarse, CW=Fine
Tighten Locking Pin to
secure Adjustment Ring


The adjustment system uses a 2mm pitch thread.
One revolution of the Adjustment Ring moves
the cone burr 2mm, in relation to
the ring burr, up or down.

See full manuals, videos & schematic at:

<https://www.oehandgrinders.com/lido-manual-coffee-grinder-info-page.html>



How to clean your grinder:

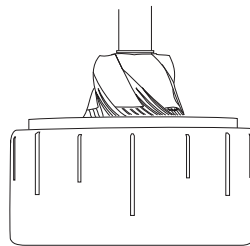

Both cone burr and ring burr can be brushed off without
affecting burr alignment. Burrs are steel - do not wash.

1. Remove screw at center of handle.
2. Remove Handle
3. Turn adjustment ring CCW to unthread fully from Burr Carrier.
4. Pull Adjustment ring, axle & cone burr down out of grinder body for access to burrs.
5. Use Care in reassembly to avoid thread damage.

Further disassembly requires additional tools and possible realignment -
See online resources for more information.

